






Pop-A-Plug® Removal Tools

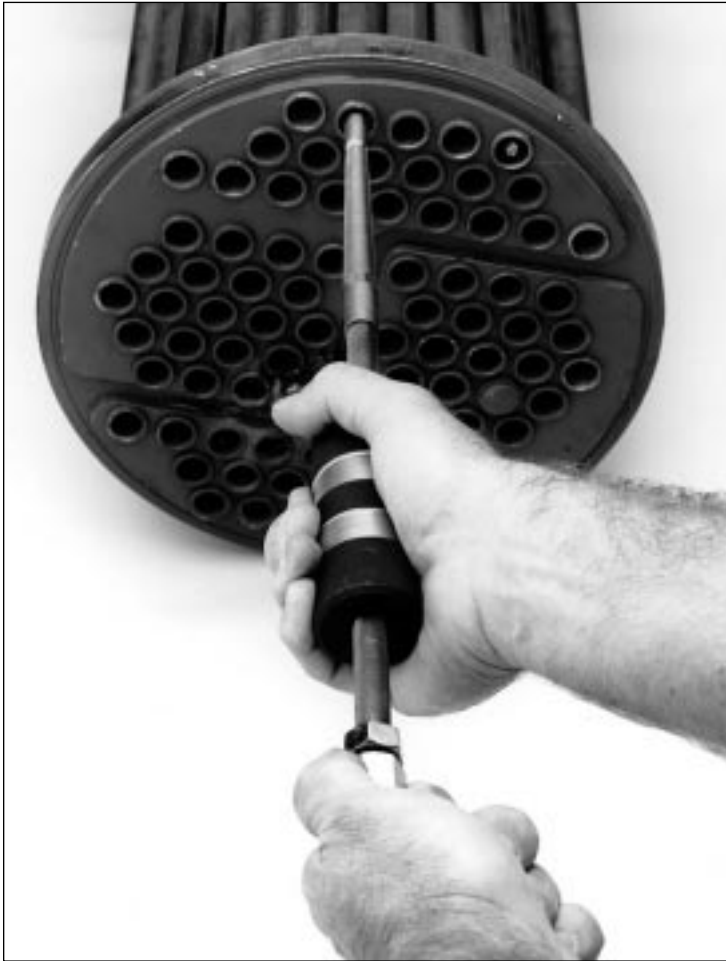

	Plug Removal Tools
	Pop-A-Plug 6600 Ram
	Close Quarter Ram
	Manual Installation Tool



Plug Removal Made Easy.

EST's Pop-A-Plug Removal Tool (PRT) is the ideal companion to our Pop-A-Plug Installation Tools — perfect for removing installed Pop-A-Plugs when it comes time to retube or retire the bundle.

The PRT can remove all styles of Pop-A-Plugs quickly and easily. A dual function tool, the PRT features a nose piece that threads into the pin of an installed plug, enabling you to drive the pin from the ring. The tool retains the pin while a serrated spear grabs the ring's ID. An integral slide hammer then lets you pull out the ring and pin complete.

The three-piece PRT consists of a main body shaft, a spear, and a slide hammer. Different spears are available to remove any size and P2 or CPI/Perma Plug.



World Headquarters:
Expansion Seal Technologies
334 Godshall Drive
Harleysville, PA 19438-2008, USA
Tel: 1-215-513-4300 Fax: 1-215-513-4333
Toll-Free: 1-800-355-7044


Expansion Seal Technologies - Europe
Utrechthaven 11e
3433 PN Nieuwegein, The Netherlands
Tel: +31-30-600-6180
Fax: +31-30-600-6188

Expansion Seal Technologies Asia Pte Ltd.
35 Tannery Rd, #11-10 Tannery Block
Ruby Industrial Complex
Singapore 347740
Tel: +65-6745-8560 Fax: +65-6742-8700

SPECIALISTS IN TUBE TESTING AND PLUGGING TECHNOLOGY

QUALITY SYSTEM ISO-9001 CERTIFIED

Plug Removal Tools

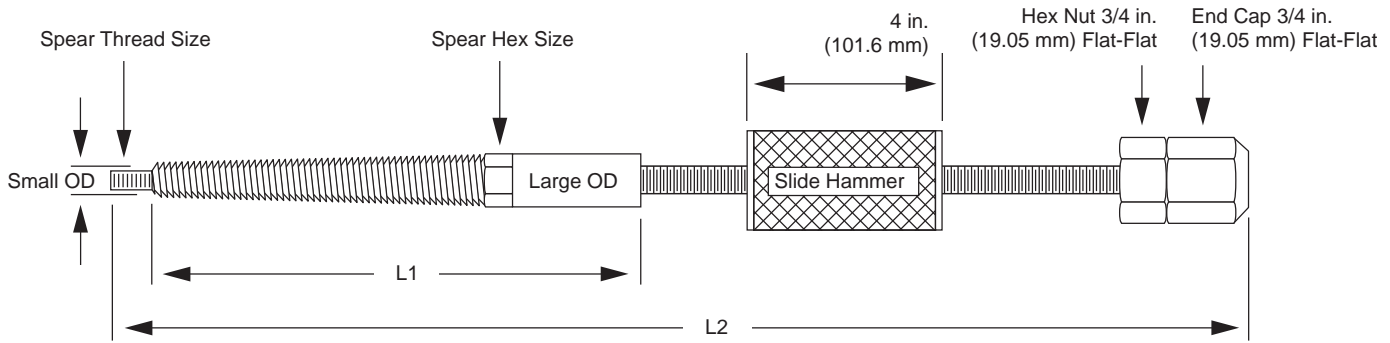

Plug Removal Tool Part Numbers & Dimensions

TOOL ASSEMBLY PART NUMBER	CPI /PERMA SIZE	P2 RANGE	SPEAR PART NUMBER	SPEAR LENGTH (L1)	OVERALL LENGTH (L2)
PRT-001	N/A	.400-.440	PRTS-001	4.35 in. (110.5 mm)	15.14 in. (384.6 mm)
PRT-002	.460 & .490	.460-500	PRTS-002	4.97 in. (126.2 mm)	15.76 in. (400.3 mm)
PRT-003	.524	.520-580	PRTS-003	4.39 in. (111.5 mm)	15.18 in. (385.6 mm)
PRT-004	.584	.600-.680	PRTS-004	4.81 in. (122.2 mm)	15.72 in. (399.3 mm)
PRT-005	.649	.700-.780	PRTS-005	5.36 in. (136.1 mm)	16.27 in. (413.3 mm)
PRT-006	.712	.800-.860	PRTS-006	6.18 in. (157.0 mm)	16.34 in. (415.0 mm)
PRT-007	.774 & .837	N/A	PRTS-007	6.08 in. (154.4 mm)	16.24 in. (415.0 mm)
PRT-008	.899 & .962	.880-.960	PRTS-008	6.61 in. (167.9 mm)	16.77 in. (426.0 mm)
PRT-009	1.024 & 1.087	.980-1.060	PRTS-009	5.83 in. (148.1 mm)	16.00 in. (406.4 mm)
PRT-010	1.149	1.080-1.160	PRTS-010	5.04 in. (128.0 mm)	15.20 in. (386.1 mm)

TOOL ASSEMBLY PART NUMBER	SPEAR HEX (FLAT-FLAT)	SMALL OD	LARGE OD	SPEAR THREAD
PRT-001	5/16 in. (7.94 mm)	.297 in. (7.5 mm)	.39 in. (9.9 mm)	10-32
PRT-002	3/8 in. (9.5 mm)	.329 in. (8.4 mm)	.45 in. (11.4 mm)	10-32/12-28
PRT-003	7/16 in. (11.1 mm)	.329 in. (8.4 mm)	1/2 in. (12.7 mm)	12-28
PRT-004	1/2 in. (12.7 mm)	.376 in. (9.6 mm)	9/16 in. (14.3 mm)	1/4-28
PRT-005	9/16 in. (14.3 mm)	.410 in. (10.4 mm)	5/8 in. (15.9 mm)	1/4-28
PRT-006	5/8 in. (15.9 mm)	.452 in. (11.5 mm)	.71 in. (18.0 mm)	1/4-28
PRT-007	5/8 in. (15.9 mm)	.497 in. (12.6 mm)	3/4 in. (19.1 mm)	5/16-24
PRT-008	3/4 in. (19.1 mm)	.601 in. (15.3 mm)	7/8 in. (22.2 mm)	5/16-24
PRT-009	13/16 in. (20.6 mm)	.704 in. (17.9 mm)	15/16 in. (23.8 mm)	5/16-24
PRT-010	7/8 in. (22.2 mm)	.808 in. (20.5 mm)	1 in. (25.4 mm)	5/16-24

Note: Each Plug Removal Tool comes complete with all the parts needed to remove the appropriate size plug. You only need to purchase additional spears if you are removing a different size plug.



World Headquarters:
Expansion Seal Technologies
 334 Godshall Drive
 Harleysville, PA 19438-2008, USA
 Tel: 1-215-513-4300 Fax: 1-215-513-4333
 Toll-Free: 1-800-355-7044

Expansion Seal Technologies - Europe
 Utrechtaven 11e
 3433 PN Nieuwegein, The Netherlands
 Tel: +31-30-600-6180
 Fax: +31-30-600-6188

Expansion Seal Technologies Asia Pte Ltd.
 35 Tannery Rd, #11-10 Tannery Block
 Ruby Industrial Complex
 Singapore 347740
 Tel: +65-6745-8560 Fax: +65-6742-8700

SPECIALISTS IN TUBE TESTING AND PLUGGING TECHNOLOGY

QUALITY SYSTEM ISO-9001 CERTIFIED